

HITACHI
Inspire the Next



Wireless and network operation for greater convenience!
Presentations, lectures, etc. in medium size meeting rooms and
classrooms are smoother than ever.

LCD Projectors
CP-X308
CP-X417






Wireless and network functions plus features ensure smooth projection

Flexible ceiling mounted or cart top use makes these projectors great for

• Wireless operation lets you start presentations and lessons smoothly.



• Manage and control numerous projectors with a single computer.

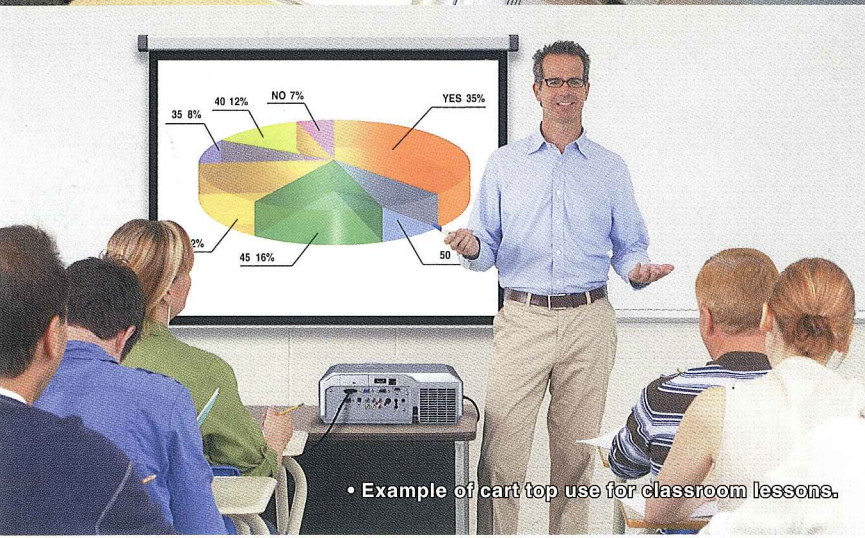

• Example of cart top use for classroom lessons.



Wireless and Network Functions

Quick Connection Compatible with Windows Vista™


With the convenient MIU Live Viewer software, you can easily set up a wired or wireless environment.

- Windows Vista™ can only be used in manual mode.
- SD wireless card is an optional for the CP-X417.



Wireless Presentation and Multi-Screen for Conferences Compatible with Windows Vista™

There's no need to connect the projector to a computer via a cable, making it much quicker to start presentations and lessons. In addition, images from four computers can be displayed at the same time by wireless control for more effective presentations. The Display User Name function in the Menu allows user names to be displayed for each computer, so it is easy to tell whose image is being displayed.



Cable connection unnecessary.




Four images on one screen.

Presenter Mode Compatible with Windows Vista™

When the projector is connected to multiple computers on a network, the output from one specific computer can be set as the projected image. Images from other computers will not be unexpectedly projected, so there is no chance of them interfering with the presentation.


Projector Monitoring and Control from a Remote Location*

One computer can monitor and control the functions of a single projector or as many LAN-connected projectors as are needed.




E-mail Alert Prevents Trouble*

The projector diagnoses possible trouble and sends an E-mail Alert to ten designated e-mail addresses.



Scheduling Function*

On/off timing can be set for automatic operation from a computer. For example, set power-on to coincide with the start of a lesson.



Control and Monitoring via Web Browser

By inputting the projector's IP address into your browser, you can perform almost all functions from the menu without installing software, in both wired and wireless configurations.

* To use Windows Vista™, it is necessary to download the latest software. Ask your dealer for details. • There are limitations on some functions that can be used with Windows Vista™. * To use these functions, it is necessary to install dedicated software from the Web. See the owner's manual for details.

many other outstanding every time.

presentations and lessons in medium size spaces.


LCD Projectors

CP-X308

2,600 ANSI Lumens

CP-X417


3,000 ANSI Lumens



Versatile Security

Hitachi Unique Technology Transition Detector Prevents Unauthorized Use

This Hitachi security function is engaged when the projector angle or setting are changed from the installed position. Even if someone takes it without authorization, that person cannot use it.



Security Bar Prevents Theft

An improved Security Bar allows easy attachment to a convenient place by a cable or chain. There is also a Kensington security slot for using a lock to attach a cable.




PIN Lock and My Screen PIN Lock


PIN Lock ensures that only those who know the PIN can use the projectors. My Screen PIN Lock locks in an image as the startup screen, such as a school name or company logo.



PIN Lock



My Screen PIN Lock




High Reliability

Less Maintenance Frequency Thanks to a Large Filter

The projector uses a large-size, highly reliable filter. The filter lasts four times as long as the type used on previous models, so when the projector is frequently used for long hours, this saves a great deal of maintenance time.

Maintenance is More Convenient: Easy Replacement of Lamp and Filter

The lamp cover is on the top of the projector and the filter is on the side. Even when mounted on the ceiling, the lamp or filter can be easily replaced. Maintenance is more convenient and faster.



Lamp door on top



Filter on side

7W Audio Output Provides Adequate Volume and High Quality Sound

7W audio output lets you give lessons or presentations with adequate volume using only the projector – no need for separate speakers or amplifiers. The sound is crisp and clear.



Superior Usability

PC-less Presentations Using Various Media

Images stored on SD cards, USB storage devices and HDD media players can be displayed using only the projector. Presentations and lessons are easier because you don't have to carry a computer around.



Projection without a computer.

Daytime Mode Enhances Clarity in Bright Conditions

Projected images may sometimes be difficult to see under bright lighting. Use the Daytime Mode to ensure clear, vivid images.



Normal mode




Daytime mode

My Text is a Useful Function

My Text lets you put text on the startup screen according to your needs, such as model name, serial number or location information.

Vertical and Horizontal Keystone Correction

These projectors provide vertical (automatic/manual) and horizontal (manual) keystone correction. Horizontal keystone correction is available on the CP-X417 only.




Other Features

- My Button • Input Source Naming • Low Noise of 29dB (Whisper Mode) • Resolution Preset and Custom Modes • Blackboard or Whiteboard Modes • 4-Second Quick Start • Direct Power On/Off • 3:2 Pull Down • Motion Adaptive Progressive Scan • Noise Reduction • Equalizing Gamma Function • Data Storage via a Network • Automatic Time Adjustment • IR Remote Frequency Change • Serial No. Label on Side • Security Label Included


SPECIFICATIONS

Model name	CP-X308	CP-X417
Liquid crystal panel	0.63" polysilicon active-matrix TFT x 3	0.63" polysilicon active-matrix TFT x 3
Number of pixels	786,432 pixels (V768 x H1,024)	786,432 pixels (V768 x H1,024)
Resolution	1,024 x 768 color pixels	1,024 x 768 color pixels
Lens	Manual zoom (F=1.7-1.9) 1:1.2	Manual zoom (F=1.6-1.8) 1:1.2
Lamp	220W UHB	220W UHB
Brightness	2,600 ANSI Lumens	3,000 ANSI Lumens
Contrast ratio	500:1	500:1
Audio	7W mono	7W mono
Keystone correction	Auto vertical keystone	Auto vertical and manual horizontal keystone
Power supply	AC100-120V/AC220-240V	AC100-120V/AC220-240V
Operating temperature	5-35°C (41-95°F)	5-35°C (41-95°F)
Input signals	Computer input Video input	VGA, SVGA, XGA, SXGA, SXGA+, UXGA, MAC16" NTSC, NTSC4.43, PAL, SECAM, M-PAL, N-PAL HDTV: 750p (720p), 1125i (1080i) SDTV: 525i (480i), 525p (480p), 625i (576i)
Input/output terminals	Video input Audio input Computer input Audio output Monitor output Control and mouse PC-less presentation Wireless network Wired network (LAN)	S-Video: Jack x 1, Composite video: RCA jack x 1 Component video: RCA jack x 3 Stereo Mini jack x 2, RCA jack x 1 (L/R) Analog RGB: 15-pin Mini-Dsub x 2 Stereo Mini jack x 1 Analog RGB: 15-pin Mini-Dsub x 1 9-pin Dsub x 1 for RS232C, USB type B x 1 for mouse control USB type A x 1, SD slot x 1 (shared with wireless) Yes (SD wireless card included) RJ-45 x 1
Agency certifications	UL60950-1/C-UL, FCC Part15 class B, AS/NZS CISPR22 class B, CE	UL60950-1/C-UL, FCC Part15 class B, AS/NZS CISPR22 class B, CE
Dimensions (WxHxD)	340 x 117 x 270mm (13.39" x 4.61" x 10.63") [excl. protruding part]	340 x 117 x 270mm (13.39" x 4.61" x 10.63") [excl. protruding part]
Weight	4kg (8.8 lbs.)	4kg (8.8 lbs.)
Standard accessories	Computer cable, Remote Control, Batteries, Lens cap, Strap, Soft case, Power cord, User's manual, Audio/video cable, Security label, SD wireless card, SD slot cover lock, Application software CD	Computer cable, Remote Control, Batteries, Lens cap, Strap, Soft case, Power cord, User's manual, Audio/video cable, Security label, SD slot cover lock, Application software CD


DIMENSIONS

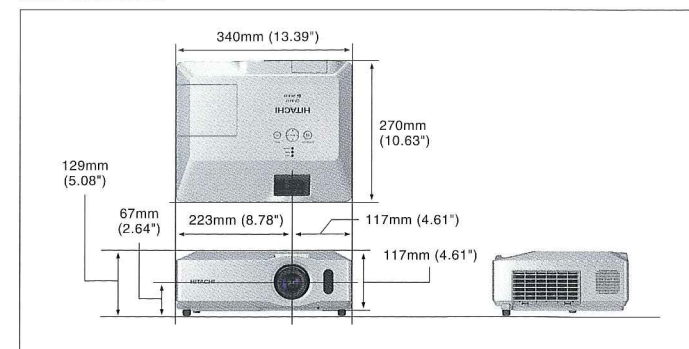

TERMINALS

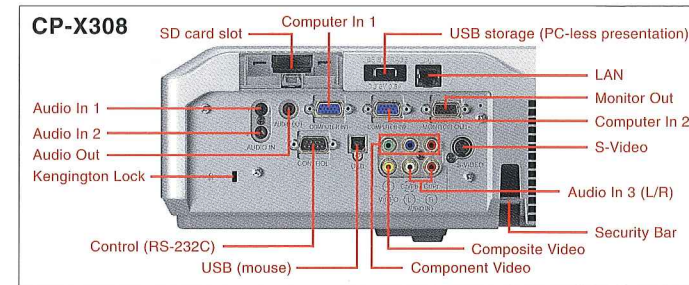

PROJECTION DISTANCE

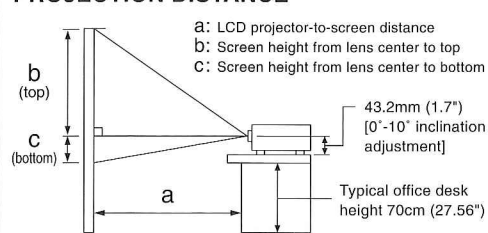

CP-X308


Screen Size (inch)	a Min	a Max	b (top)	c (bottom)
30	0.9m (35")	1.1m (43")	41cm (16")	5cm (2")
40	1.2m (47")	1.4m (57")	55cm (22")	6cm (2")
50	1.5m (59")	1.8m (71")	69cm (27")	8cm (3")
60	1.8m (71")	2.2m (86")	82cm (32")	9cm (4")
70	2.1m (83")	2.5m (100")	96cm (38")	11cm (4")
80	2.4m (95")	2.9m (115")	110cm (43")	12cm (5")
90	2.7m (107")	3.3m (129")	123cm (49")	14cm (5")
100	3.0m (119")	3.6m (144")	137cm (54")	15cm (6")
120	3.6m (143")	4.4m (172")	165cm (65")	18cm (7")
150	4.6m (179")	5.5m (216")	206cm (81")	23cm (9")
200	6.1m (239")	7.3m (288")	274cm (108")	30cm (12")
250	7.6m (299")	9.1m (360")	343cm (135")	38cm (15")
300	9.1m (359")	11.0m (432")	411cm (162")	46cm (18")

CP-X417

Screen Size (inch)	a Min	a Max	b (top)	c (bottom)
30	0.9m (34")	1.1m (41")	41cm (16")	5cm (2")
40	1.2m (46")	1.4m (56")	55cm (22")	6cm (2")
50	1.5m (58")	1.8m (70")	69cm (27")	8cm (3")
60	1.8m (70")	2.1m (84")	82cm (32")	9cm (4")
70	2.1m (81")	2.5m (98")	96cm (38")	11cm (4")
80	2.4m (93")	2.8m (112")	110cm (43")	12cm (5")
90	2.7m (105")	3.2m (126")	123cm (49")	14cm (5")
100	3.0m (117")	3.6m (140")	137cm (54")	15cm (6")
120	3.6m (140")	4.3m (169")	165cm (65")	18cm (7")
150	4.5m (176")	5.4m (211")	206cm (81")	23cm (9")
200	6.0m (235")	7.2m (282")	274cm (108")	30cm (12")
250	7.5m (294")	9.0m (353")	343cm (135")	38cm (15")
300	9.0m (352")	10.8m (423")	411cm (162")	46cm (18")

* Final specifications may vary slightly.

CP-X417

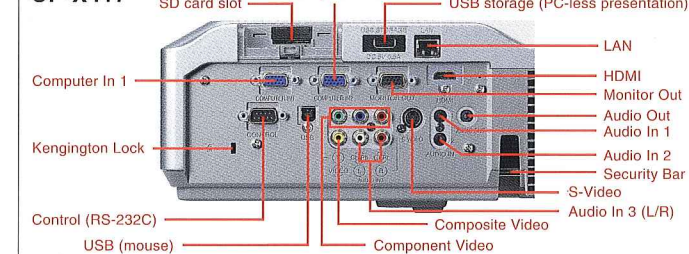

* Design and specifications are subject to change without notice.

- The screen and monitor images and comparison photos in this catalog are simulations.
- LCD panels, polarizers and other optical components and cooling fans may need replacement after prolonged usage. For more details, please consult a Hitachi sales representative.
- Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction.
- Optical components (lamp, LCD panel, polarizing plate, PBS [polarizer beam splitter], contrast-up film) have limited service lives. They must be repaired or replaced if they are used for a long period of time.
- These projectors use a mercury lamp with high internal pressure. Because of its properties, this lamp may burst with a loud noise or burn out if struck or after it has been used for a period of time. The time until it bursts or burns out varies greatly according to differences between lamps and usage conditions. Turning the lamp's power on and off frequently shortens its service life.
- Optical components other than the lamp: If the projector is used for six hours or more per day, they may need to be replaced in less than a year.
- LCD panel: If the projector is used continuously for six hours or more, its replacement cycle may be shortened.
- Do not turn projector on again for ten minutes after shutdown. Neglect can shorten the lifetime of the lamp. During use and immediately after use, do not touch anywhere near the lamp and the vents as these parts are extremely hot.
- Windows Vista is a trademark of Microsoft Corporation.
- HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

HITACHI

Hitachi America, Ltd. Ubiquitous Platform System Division 900 Hitachi Way, Chula Vista, CA91914-3556, U.S.A. Tel: +1-800-HITACHI Fax: +1-619-591-5418 www.hitachi.us/digitalmedia

Hitachi Canada Ltd. 2495 Meadowpine Blvd. Mississauga, Ontario L5N6C3, Canada Tel: +1-905-821-4545 Fax: +1-905-821-1101 www.hitachi.ca

Hitachi Home Electronics Asia (S) Pte. Ltd. 438A Alexandra Road #01-01/02/03, Alexandra Technopark, Singapore 119967 Tel: +65-6536-2521 Fax: +65-6536-2520 www.hitachiconsumer.com.sg

Hitachi Sales (Malaysia) Sdn. Berhad (11543-V) Lot 12, Jalan Kemajuan, Bangi Industrial Estate, 43650 Bandar Baru Bangi, Selangor Darul Ehsan, Malaysia. Tel: +60-3-8926-4168 Fax: +60-3-8926-3013 www.hitachiconsumer.com.my

Hitachi Sales (Thailand), Ltd. 994 Soi Thonglor, Sukhumvit 55 Road, Klongtonnua, Vadhana Bangkok 10110, Thailand Tel: +66-2381-8381-98 Fax: +66-2381-0210/2381-0021

Hitachi (Hong Kong), Ltd. 18th Floor, Ever Gain Centre, 28 On Muk Street, Shatin, N.T., Hong Kong Tel: +852-2113-8883 Fax: +852-2783-4178 www.hitachi-hk.com.hk

Hitachi Sales Corp. of Taiwan 2nd Floor, No.65, Nanking East Road, Section 3, Taipei 104, Taiwan Tel: +886-2-2516-0500 Fax: +886-2-2516-1501

Hitachi Australia Pty Ltd. Level 3, 82 Waterloo Road, North Ryde, NSW 2113, Australia Tel: +61-2-9888-4100 Fax: +61-2-9888-4188 www.hitachi.com.au

Hitachi Europe Ltd. Whitebrook Park, Lower Cookham Road, Maidenhead, Berkshire, SL6 8YA, UK Tel: +44-1628-643000 Fax: +44-1628-643404 www.hitachidigitalmedia.com

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE

3LCD

dnx
pixelworks

ISO 14001
JACO
UKAS
ENVIRONMENTAL
MANAGEMENT
051
Hitachi, Ltd. Consumer Business
Group has received ISO 14001
certification.

Printed in Japan (H) NM-E317 0907