

One solution... absolute simplicity

The comprehensive **ēno one fixed wall mount** provides an economical solution for years of interactivity in the classroom. From drywall to concrete, ēno one installs on any type of wall. It's projector boom features a built-in, breakaway safety feature. And, the dedicated projector icon strip gives the teacher more control—right at the board. With unsurpassed durability and teacher conveniences, ēno one will bring inspiration to the classroom year after year.

ēno one simplifies purchasing for districts, installation for schools, instruction for teachers and comprehension for students. With its ēno interactive whiteboard, PolyVision PJ905 projector (with driver and dedicated icon strip), educational software, and mount in a single solution from one provider, ēno one allows teachers to begin teaching while other schools are still in the purchase process.




Features

- Flexibility—Save valuable lesson time by controlling and interacting with ēno, the projector and peripherals in one place: at the board. Teachers are always ready to demonstrate key concepts from the front of the classroom.
- More time for lessons—Integration of ēno one's multi-user, multi-media and multi-functional features enable quick lesson reference and seamless instruction. A fun learning environment is guaranteed for all!
- Uncomplicated training—With just one solution to learn, teachers use dedicated buttons to manipulate the board and projector and seamlessly teach with the software they have always known and loved, maximizing valuable classroom time.
- Maximized budgets—Purchasing and support from one company, coupled with simple installation, reduces time and costs for schools and districts seeking to get the most from their interactive technology implementation.
- Cleaner and greener classrooms—The ēno board is environmentally certified, is recyclable and made with PolyVision's virtually indestructible *e³ environmental ceramicsteel™* surface. So, choosing the ēno one interactive classroom solution helps conserve natural resources and ensures clean air in the classroom—protecting our earth and children for generations.



"With all ēno one controls at the board, I can quickly make adjustments and dive into lessons without missing a beat."

technical specifications

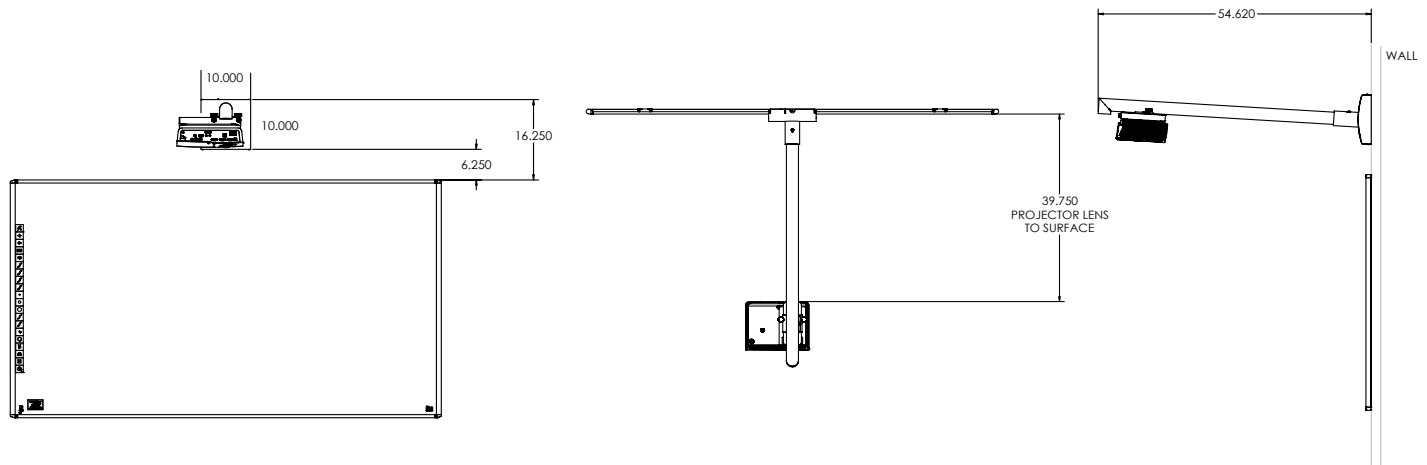

SKU	Interactive Whiteboard	Projector	Mount	Total shipping weight
ēno one 2610 FWA	ēno 2610	PJ905	Fixed wall arm	112 lbs.
ēno one 2810 FWA	ēno 2810	PJ905	Fixed wall arm	137 lbs.
ēno one 2650 FWA	ēno click 2650	PJ905	Fixed wall arm	93 lbs.
ēno one 2850 FWA	ēno click 2850	PJ905	Fixed wall arm	110 lbs.

Interactive whiteboard

- Includes ēno 2610, ēno 2810, ēno click 2650 or ēno click 2850
- Environmentally certified: MBDC Cradle-to-CradleSM Silver and SCS Indoor Advantage Gold[®]
- Warranty: Forever Warranty[™] on the surface; 10 years on construction (including trim and mounting brackets); 2 years on stylus and Bluetooth[®] receiver
- Shipping specs for ēno 2610: 71" x 54" x 5"; 69 lbs.
- Shipping specs for ēno 2810: 91" x 54" x 5"; 94 lbs.
- Shipping specs for ēno click 2650: 71" x 54" x 5"; 50 lbs.
- Shipping specs for ēno click 2850: 91" x 54" x 5"; 67 lbs.

Fixed wall mount unit

- Projector boom assembly: built-in breakaway plate safety mechanism
- Installs on stud/drywall, wood, brick, cinderblock or concrete wall
- Internal cable storage
- Paper template included
- Finish: black powdercoat
- Warranty: 5 years
- Shipping specs for fixed wall arm: 14" x 53" x 7"; 30 lbs.

Short-throw PolyVision PJ905 projector

- DLP with Brilliant Color technology
- Native resolution: WXGA (1280 x 800)
- Aspect ratio: 16:10 Native, 16:9, 4:3
- Brightness: 2500 Lumens (typical); 2000 Lumens (eco mode)
- Lamp life: 3000/4000 hrs.
- 6-segment color wheel (RGBWCWY)
- Contrast ratio: 2000:1
- 7 watt built-in speaker

- Keystone correction: ±15 degrees
- I/O connections: VGA (x2), HDMI, S-Video, Composite Video RCA, Audio RCA (R, L, Mono), Audio mini jack (in and out loop), VGA Monitor Out
- Control terminals: LAN Ethernet RJ45, USB, Serial RS-232
- Networks: IP for remote management
- Compatibility for video system: NTSC 4.43, PAL-N, PAL-M, SECAM
- Compatibility for video interface: Composite, S-Video, Component YPbPr, Component YCbCr, VESA RGB
- Format compatibility: VGA, SVGA, SXGA+, UXGA

- Acoustic noise: 34dB (typical 230 W); 29 dB (typical eco mode 190 W)
- Weight: 7.6 lbs (<3.45 kgs)
- Lamp replacement accessible when mounted
- Warranty: 3 years on projector; 3 years on lamp
- Kensington theft protection

- Power cord: 4.5m
- VGA cable: 4.5m
- USB cable: 4.5m
- Power requirements: 100V-240V, 50 / 60 Hz
- Power consumption: 290 W (normal use); <1 W (standby)
- Temperature: 5°C ~ 35°C; -10°C ~ 60°C (non-operating)
- Operating altitude: sea level to 10,000' at 23°C°
- Humidity: 10% - 85% (no condensation); 5% - 95% (no condensation, non-operating)
- Shipping specs: 18" x 15" x 7"; 13 lbs.



eVision[™] PolyVision is committed to move toward sustainability in all areas of environmental stewardship—to protect people, replenish natural resources, and restore the communities in which we work and live.

©2010 PolyVision Corporation. All rights reserved. Trademarks used herein are the property of PolyVision Corporation or of their respective owners. PolyVision Corporation reserves the right to make changes in product design, construction or detail, and to discontinue any product or material without notice.

18Oct10

1.800.620.POLY
www.polyvision.com
info@polyvision.com

PolyVision[®]
a steelcase company